


# INSTALLATION GUIDE

## PRODUCT DETAILS



## PRODUCT CONSTRUCTION

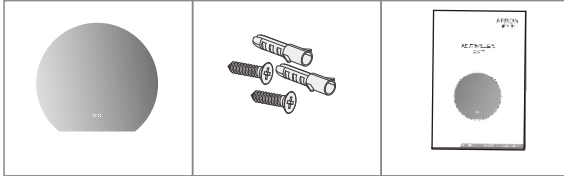

VSN-450\*900






CLA-500\*900






CDA-800\*900

## OPERATIONAL GUIDE


1. Short press the touch sensor  on the bottom of mirror to turn the LED light on /off and change the color from 3000k-4500k-6000k
2. Hold the finger on the touch sensor  to control the brightness. LED will begin to dim or brighten.
3. Press the touch  on the bottom of mirror to turn the defogging function on or off.




## INSTALLATION TIPS

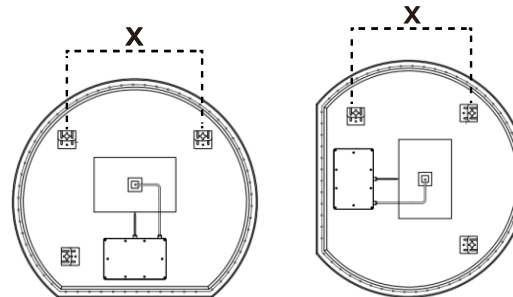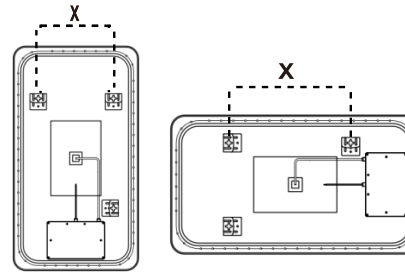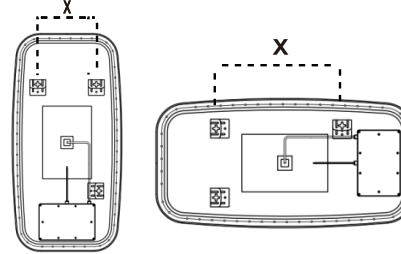


### 1 TOOLS NEED



### 2 WALL FIXING

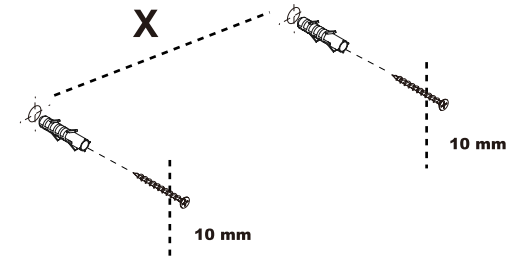

### 3 POWER CONNECT

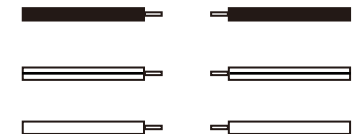

- 1: Maintenance of mirror: Clean and wipe mirror surface regularly, and wipe the condensation vapor with dry and soft
- 2: Use only a damp cloth or dust-free cloth to clean the mirror . Mirrors are damaged by use of ammonia or vinegar based cleaners. Rubbing alcohol can be used for stubborn stains
- 3: Ensure that there is no damage to the glass mirror and checking carefully the installations